

Effortless Wheel

Elastic Natural Rubber Wheels with
a Nylon Center



Key Attributes Include:

- Support loads up to 880 lb
- With or without bearings
- Low rolling resistance
- Virtually no noise
- Safe for all floor types


Stellana

A HEXPOL COMPANY


Elastic Natural Rubber Wheel



Plain Bearing




Roller Bearing



Ball Bearing

Bearing Options

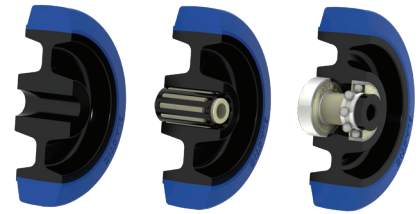

Plain Bore

Roller Bearing

Ball Bearing

Temperature Resistance

2/5 -20 to +70 °C

Noise Emission

4/5 Very good

Rolling Resistance

4/5 Very good

Floor Protection

4/5 Very good

- 67 +/- 3 Shore A
- High quality natural rubber
- Impact resistant nylon hub
- Hub and ring color options
- Ergonomic design

Wheel Size	EEC 3"	EEC 3"	EEC 4"	EEC 4"	EEC 5"	EEC 5"	EEC 6"
Dimensions	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.
Type	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Plain Bore	Roller Bearing	Roller Bearing
Outer diameter (D1)	3 - 1/8 "	3 - 1/8 "	3 -15/16"	3 -15/16"	4-15/16"	4-15/16"	5-14/16"
Bore diameter (D3) (Without hollow shaft)	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	13/16"
Bore diameter (D2) (With hollow shaft)	5/16"	5/16"	5/16"	5/16"	5/16"	5/16"	1/2"
Wheel width (T1)	1 -3/8"	1 -3/8"	1-7/16"	1-7/16"	1-7/16"	1-7/16"	1-15/16"
Hub length (T2) (Without hollow shaft)	1-9/16" or 1-3/4"	1-9/16" or 1-3/4"	1-9/16" or 1-3/4"	1-9/16" or 1-3/4"	1-9/16" or 1-3/4"	1-9/16" or 1-3/4"	2-3/8"
Hub length (T3) (With hollow shaft)	1 - 5/8" or 1-7/8"	1 - 5/8" or 1-7/8"	1 -5/8" or 1-7/8"	1 -5/8" or 1-7/8"	1 -5/8" or 1-7/8"	1 -5/8" or 1-7/8"	2-3/8"
Tire tread width (T4)	1"	1"	1 1/8"	1 1/8"	1-1/8"	1-1/8"	1-5/8"
Load bearing Capacity	220	220	330	330	380	380	660

Wheel Size	EEC 6"	EEC 6 5/16"	EEC 6 5/16"	EEC 7"	EEC 7"	EEC 8"	EEC 8"
Dimensions	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.	Inches & lb.
Type	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3	Roller Bearing	6204ZZ C3
Outer diameter (D1)	5-14/16"	6-5/16"	6-5/16"	7-1/16"	7-1/16"	7-14/16"	7-14/16"
Bore diameter (D3) (Without hollow shaft)	-	13/16"	-	13/16"	-	13/16"	-
Bore diameter (D2) (With hollow shaft)	-	1/2"	-	1/2"	-	1/2"	-
Bore diameter (D4) (Ball bearing with bushing)	8/16"	-	8/16"	-	8/16"	-	8/16"
Wheel width (T1)	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"
Hub length (T2) (Without hollow shaft)	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"	2-3/8"
Hub length (T3) (With hollow shaft)	-	2-3/8"	-	2-3/8"	-	2-3/8"	-
Tire tread width (T4)	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"	1-5/8"
Load bearing Capacity	660	770	770	820	820	880	880

Load capacity tested according to EN12532 standard

STELLANA.COM | INFO@STELLANA.COM

No: 371, Colombo Road, Bokundara, Piliyandala, PC 10300, Sri Lanka

PHONE: +94 11 4212722 | FAX: +94 11 2518525